



## Heyco® Nylon Corrugated Conduit/Tubing - FPAS

Highly Flexible Polyamide 6 Nylon, Standard Weight

### Type FPAS

- Low fire hazard.
- Low smoke and toxicity.
- Halogen, sulphur, and phosphorus free.
- Highly flexible and high fatigue life.
- High impact strength and recovers if crushed.
- Lightweight and low installed cost.
- Use with Heyco Nylon Fittings. See pages 2-23 through 2-25.
- UV resistant (black).
- For use with all types of equipment, machinery, pumps, motors, and HVAC equipment.
- 10 mm thru 42 mm nominal sizes.
- Highly resistant to abrasion, oil, and solvents.
- Compression Strength: 75 kg/100 mm (165 lbs./4 in.) for 21 mm nominal size
- Tensile Strength: 40 kg (88 lbs.) for 21 mm nominal size
- **Voltage Rating: 600V for F8474 and F8416. All others 300V.**
- See Page 2-22 for mounting clips.
- See Pages 2-26 and 2-27 for technical specifications.


NOMINAL SIZE	PITCH	PART NO. Black	DESCRIPTION	PART DIMENSIONS							
				Inside Bend Radius		A Inside Diameter		B Outside Diameter		Roll Length	
				in.	mm.	in.	mm.	in.	mm.	Ft.	M.
10 mm	F	<b>F8400</b>	FPAS 10/BL*	.591	15,0	.248	6,3	.394	10,0		
13 mm	F	<b>F8402</b>	FPAS 13/BL*	.984	25,0	.386	9,8	.512	13,0		
16 mm	F	<b>F8404</b>	FPAS 16/BL	1.575	40,0	.465	11,8	.622	15,8	164	50
21 mm	F	<b>F8406</b>	FPAS 21/BL	1.722	45,0	.657	16,7	.835	21,2		
28 mm	F	<b>F8410</b>	FPAS 28/BL	1.969	50,0	.898	22,8	1.122	28,5		
34 mm	C	<b>F8414</b>	FPAS 34/BL	2.362	60,0	1.106	28,1	1.358	34,5	164	50
		<b>F8474</b>	FPAS 34/BL**	2.362	60,0	1.106	28,1	1.358	34,5	328	100
42 mm	C	<b>F8416</b>	FPAS 42/BL	2.756	70,0	1.398	35,5	1.673	42,5	82	25

Standard color black.

\*Not UL recognized.

\*\*Extra long 328 ft. (100 meter) coil.

PITCH: Indicates frequency and separation of corrugations. F=Fine or closely spaced and C=Coarse or less closely spaced, fittings work equally well with either fine or coarse pitch conduit.

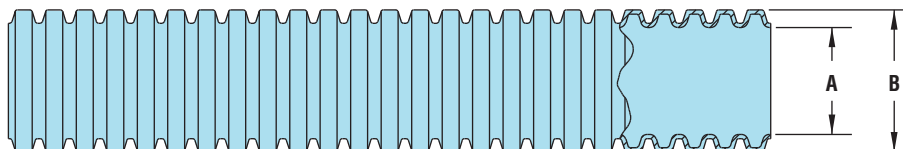

Quick Specs

Material	Nylon 6 (PA6)
Certifications	Recognized under Underwriters' Laboratories File E229161 Approved as per EN50086
Flammability Rating	94V-2 and Halogen Free
Temperature Range	-40°F (-40°C) to 248°F (120°C) - static -4°F (-20°C) to 212°F (100°C) - moving
IP Rating	IP 66 with FPA Fittings Per EN60529