



Heyco® Rubber Push-In Bumpers

- Rubber bumpers are designed for through hole installation.
- Designed to fit snugly into your opening and not let air, water, etc. pass through.
- Can also be used as feet.
- For Heyco Adhesive-Backed Bumpers see page 75.
- Part Description Key: RGB X-Y-Z where X = Mounting Hole Diameter (inches), Y = Base Diameter (inches), and Z/32 = Base Height (inches).

| PANEL DIMENSIONS | | | | PART NO. | DESCRIPTION | MATERIAL | PART DIMENSIONS | | | | | | | |
|--------------------|-----|-------------------|-----|----------|-------------|----------|--------------------|------------------|----------------------|-----|--------------------|-----|-----|-----|
| Mounting Hole Dia. | | Maximum Thickness | | | | | A Base Diameter | B Base Height | C Insert Diameter | | D Insert Height | | | |
| in. | mm. | in. | mm. | Black | in. | mm. | | | in. | mm. | in. | mm. | in. | mm. |

Type H

| | | | | | | | | | | | | | | |
|------|-----|------|-----|-------|----------------|------------|-----|------|-----|-----|-----|-----|-----|-----|
| .203 | 5,2 | .078 | 2,0 | G3116 | RGB 203-812-6 | Santoprene | .81 | 20,6 | .19 | 4,7 | .22 | 5,6 | .20 | 5,1 |
| | | | | G3117 | RGB 203-812-8 | Santoprene | .81 | 20,6 | .25 | 6,4 | | | | |
| | | | | G3118 | RGB 203-812-12 | Santoprene | .81 | 20,6 | .38 | 9,5 | | | | |

Type D

| | | | | | | | | | | | | | | |
|------|------|------|-----|-------|----------------|-----|------|------|-----|-----|-----|------|-----|-----|
| .218 | 5,5 | .093 | 2,4 | G2016 | RGB 218-406-6 | SBR | .41 | 10,4 | .19 | 4,8 | .28 | 7,1 | .09 | 2,3 |
| .250 | 6,4 | .047 | 1,2 | G2020 | RGB 250-500-6 | SBR | .50 | 12,7 | .17 | 4,3 | .31 | 7,9 | .19 | 4,8 |
| .312 | 7,9 | .062 | 1,6 | G2035 | RGB 312-375-5 | SBR | .38 | 9,7 | .16 | 4,1 | .38 | 9,7 | .16 | 4,1 |
| .328 | 8,3 | .094 | 2,4 | G2039 | RGB 328-846-6 | SBR | .85 | 21,5 | .19 | 4,8 | .42 | 10,7 | .27 | 6,9 |
| .500 | 12,7 | .125 | 3,2 | G2043 | RGB 500-1000-6 | SBR | 1.00 | 25,4 | .19 | 4,8 | .63 | 16,0 | .13 | 3,3 |

Type T1


| | | | | | | | | | | | | | | |
|------|-----|------|-----|-------|---------------|------|-----|------|-----|-----|-----|-----|-----|------|
| .118 | 3,0 | .098 | 2,5 | G2000 | RGB 118-236-4 | EPDM | .24 | 6,1 | .12 | 3,0 | .20 | 5,1 | .47 | 11,9 |
| .177 | 4,5 | .059 | 1,5 | G2006 | RGB 177-334-9 | SBR | .33 | 8,4 | .30 | 7,6 | .24 | 6,1 | .73 | 18,5 |
| .218 | 5,5 | .125 | 3,2 | G2017 | RGB 218-875-6 | SBR | .88 | 22,4 | .17 | 4,3 | .34 | 8,7 | .48 | 12,2 |

Type T2*


| | | | | | | | | | | | | | | |
|------|-----|------|-----|-------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| .187 | 4,7 | .047 | 1,2 | G2009 | RGB 187-250-6 | SBR | .25 | 6,4 | .19 | 4,7 | .23 | 5,8 | .34 | 8,6 |
|------|-----|------|-----|-------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|

Standard color black.



*Designed for pull through applications.





Type H




Type D

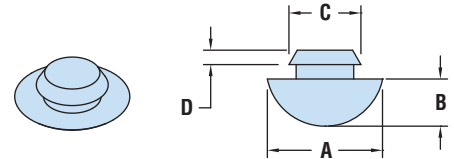

Type T1



Type T2



Quick
Specs

Material
Temperature Range

TPE, SBR, or EPDM
-40°F (-40°C) to 221°F (105°C)